

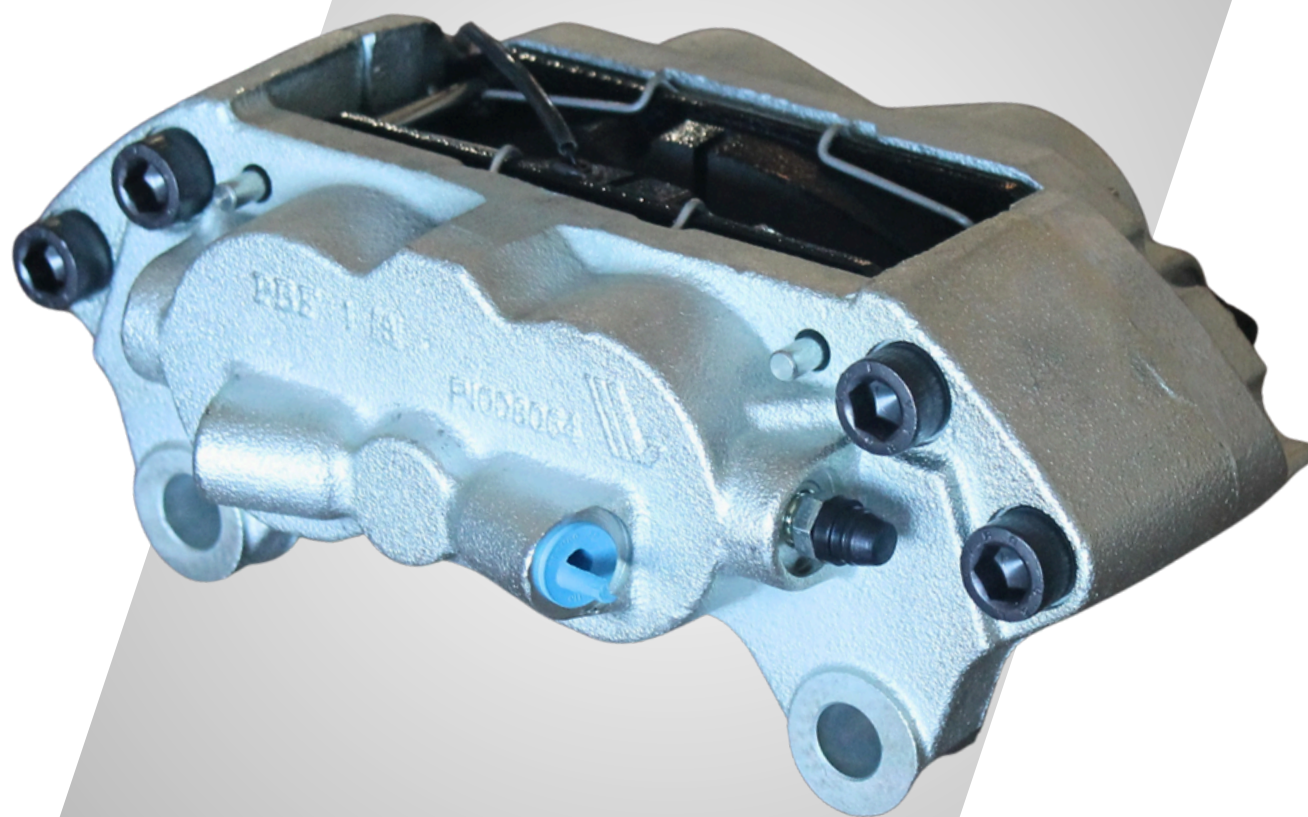



BRAKE CALIPER

4X44/4X48 SERIES

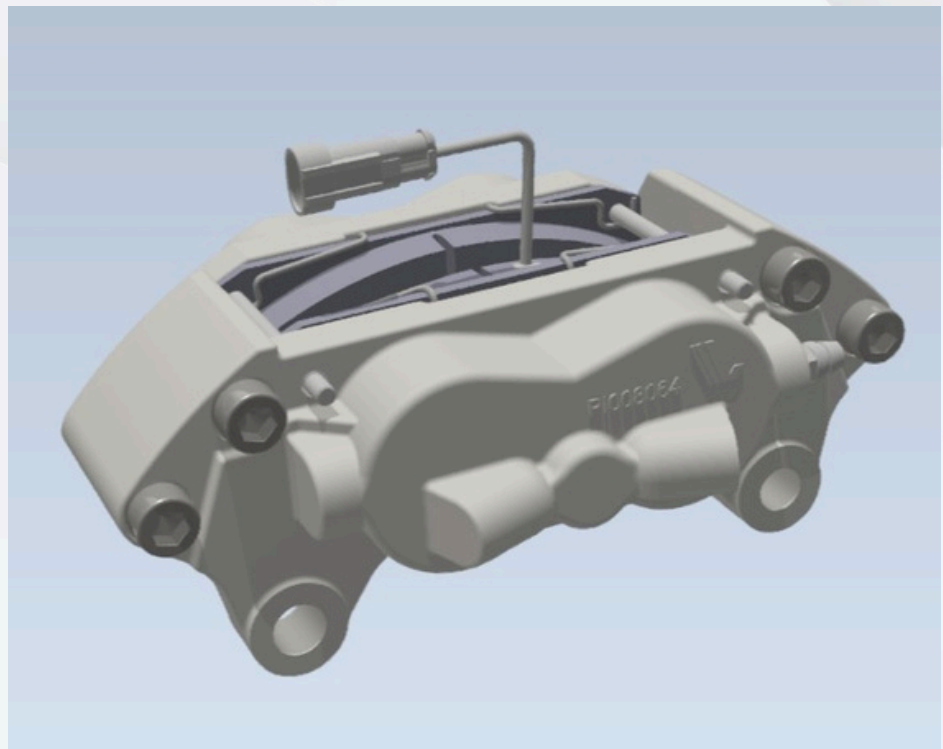

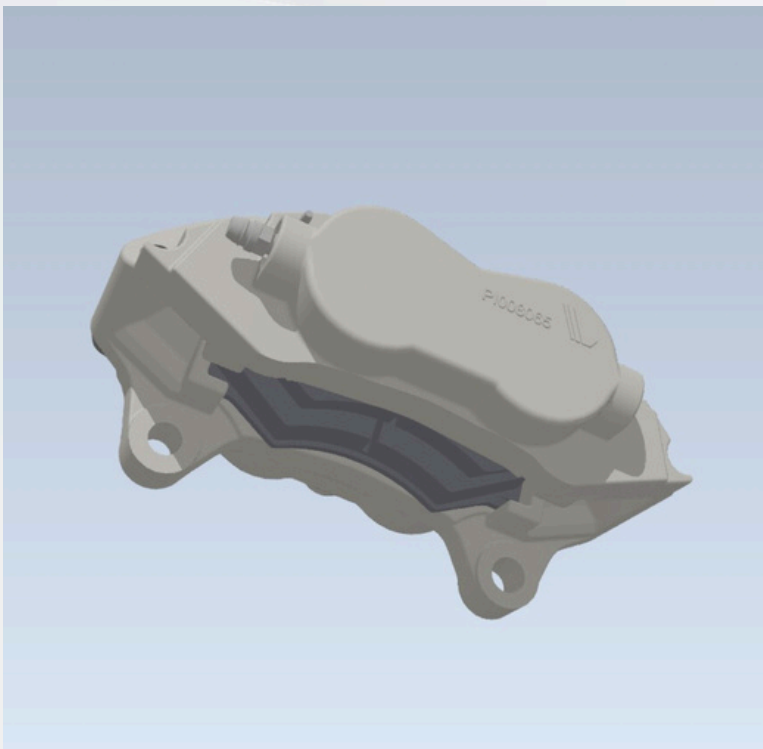

The evolution of Vimoter's brake caliper range takes shape in the **SERIES 4x44/4x48**, a fixed, axial-mount caliper engineered for demanding applications. The **EN-GJS-500-7** spheroidal graphite cast iron housing ensures outstanding mechanical performance, while the **44 or 48 mm** chrome-plated steel pistons deliver a modular, consistent braking response. Featuring a versatile sealing system compatible with both **DOT and mineral oil**, a disc diameter range of **280-303 mm**, and a wide selection of friction materials, this unit sets a new benchmark for braking reliability and precision.

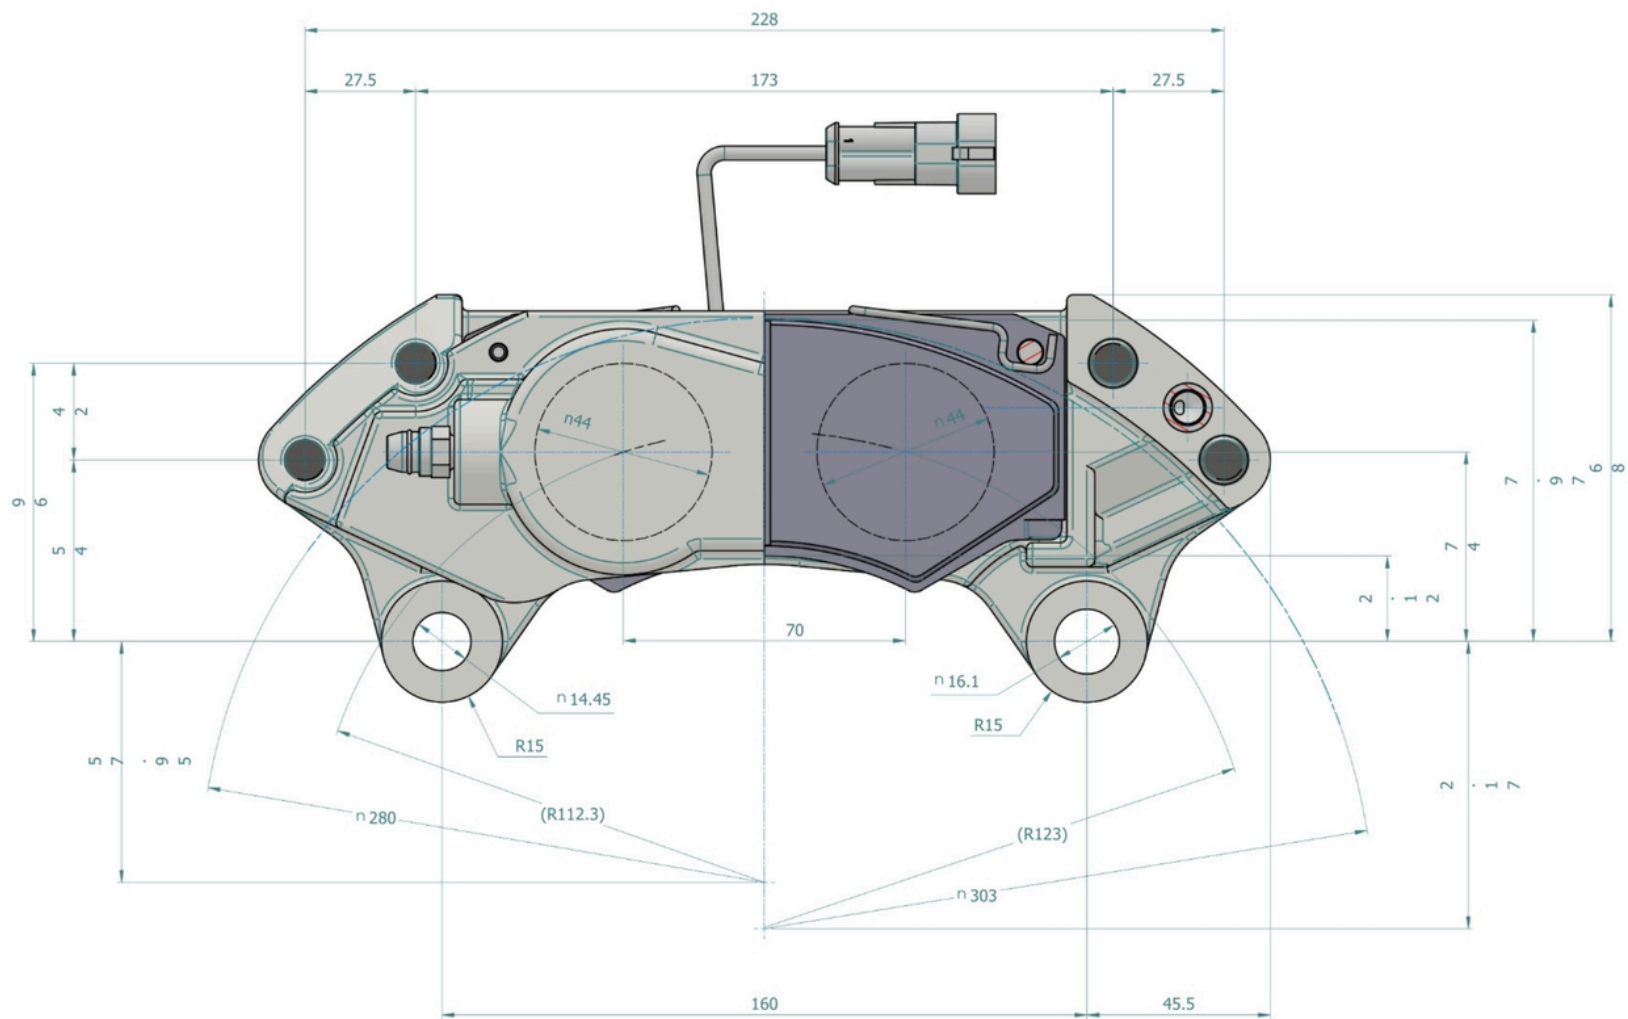


TECHNICAL SPECIFICATIONS

MAXIMUM OPERATING PRESSURE	150	BAR
NUMBER OF PADS AND SURFACE AREA	2 x 75	CM ²
DISC THICKNESS	16	MM
DISC DIAMETER (MAX/MIN)	280 / 303	MM
WEIGHT (WITH PADS)	8	KG
ACTUATING FLUID	OLIO FRENI DOT / OLIO MINERALE	

PERFORMANCE

NUMBER OF PISTONS AND DIAMETER	4 x 44	4 x 48
BRAKING TORQUE	3.500 / 3.900 Nm	4.250 / 4.700 Nm

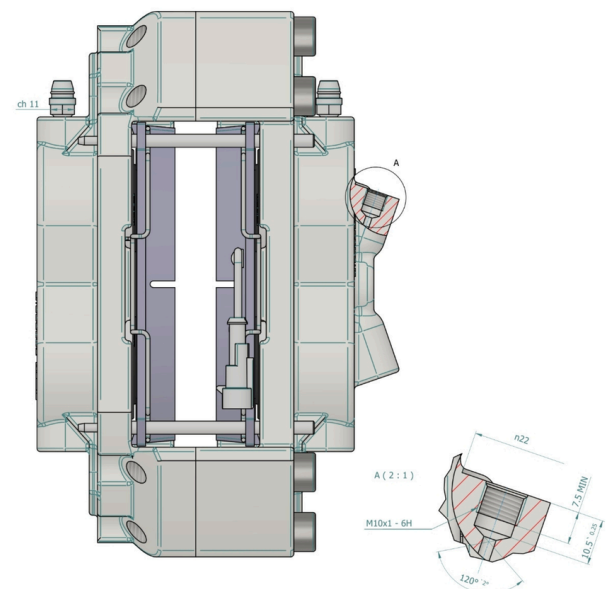

*Also available with M18x1.5 bracket mounting holes.

VIMOTER S.p.A.
Via Nazario Sauro, 15
20037 Paderno Dugnano (MI)



www.vimoter.it
info@vimoter.it
+39 0362 364011

