

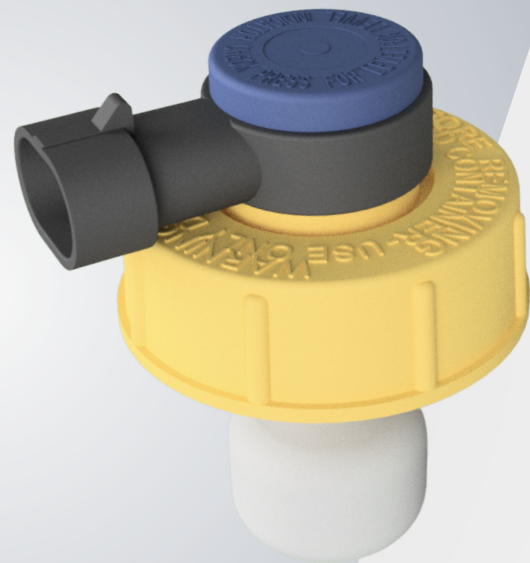
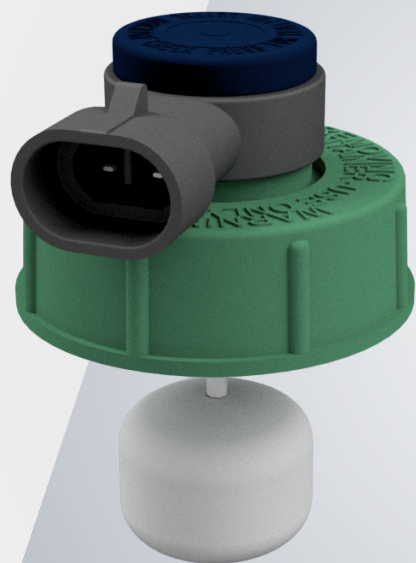
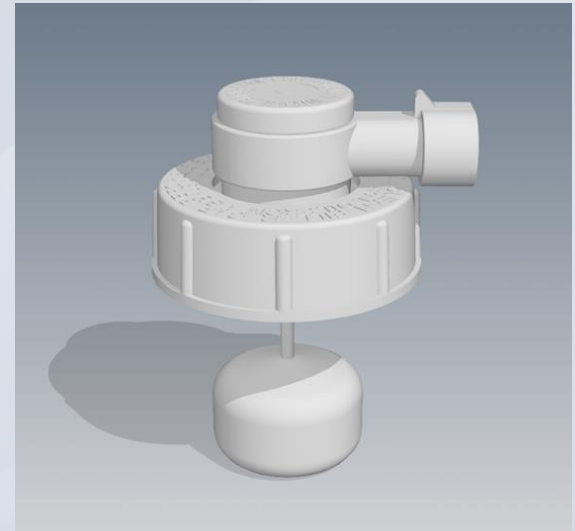


ELECTRIC PLUG


PD008900

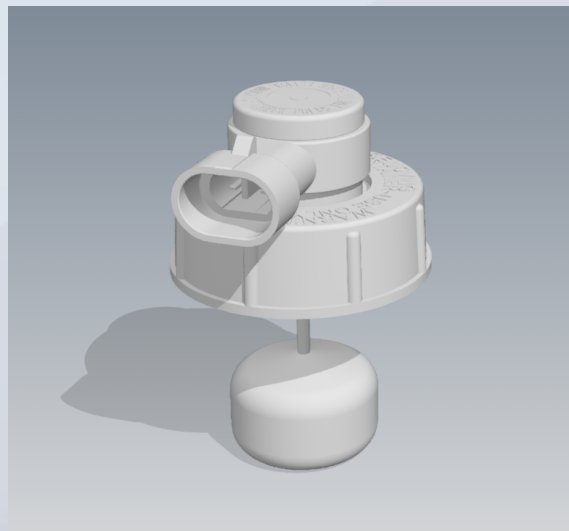

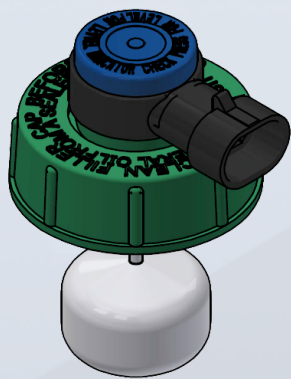

Designed to excel in severe operating environments, the new **Electric Plug PD008900** evolves the mechanics of the 12209 model toward superior structural standards. While preserving the float-actuated system and project-customizable fixed-length rods, the system implements a significantly more robust architecture.

The primary upgrade lies in the electrical interface: the new adjustable SuperSeal connector with **IP67** protection ensures total hermetic sealing compared to previous Faston terminals. This configuration optimizes wiring layout, albeit with a slight increase in external dimensions. The component, featuring a **12V** nominal voltage, is compatible with tank coupling diameters of **Ø40.5** and **Ø44.5 mm**, utilizing a threaded interface with a **4-2 turn pitch**. Available for both **DOT fluid** and **mineral oil** (green cap version, **PD008900M** model), this component is engineered to streamline wiring integration on next-generation systems.

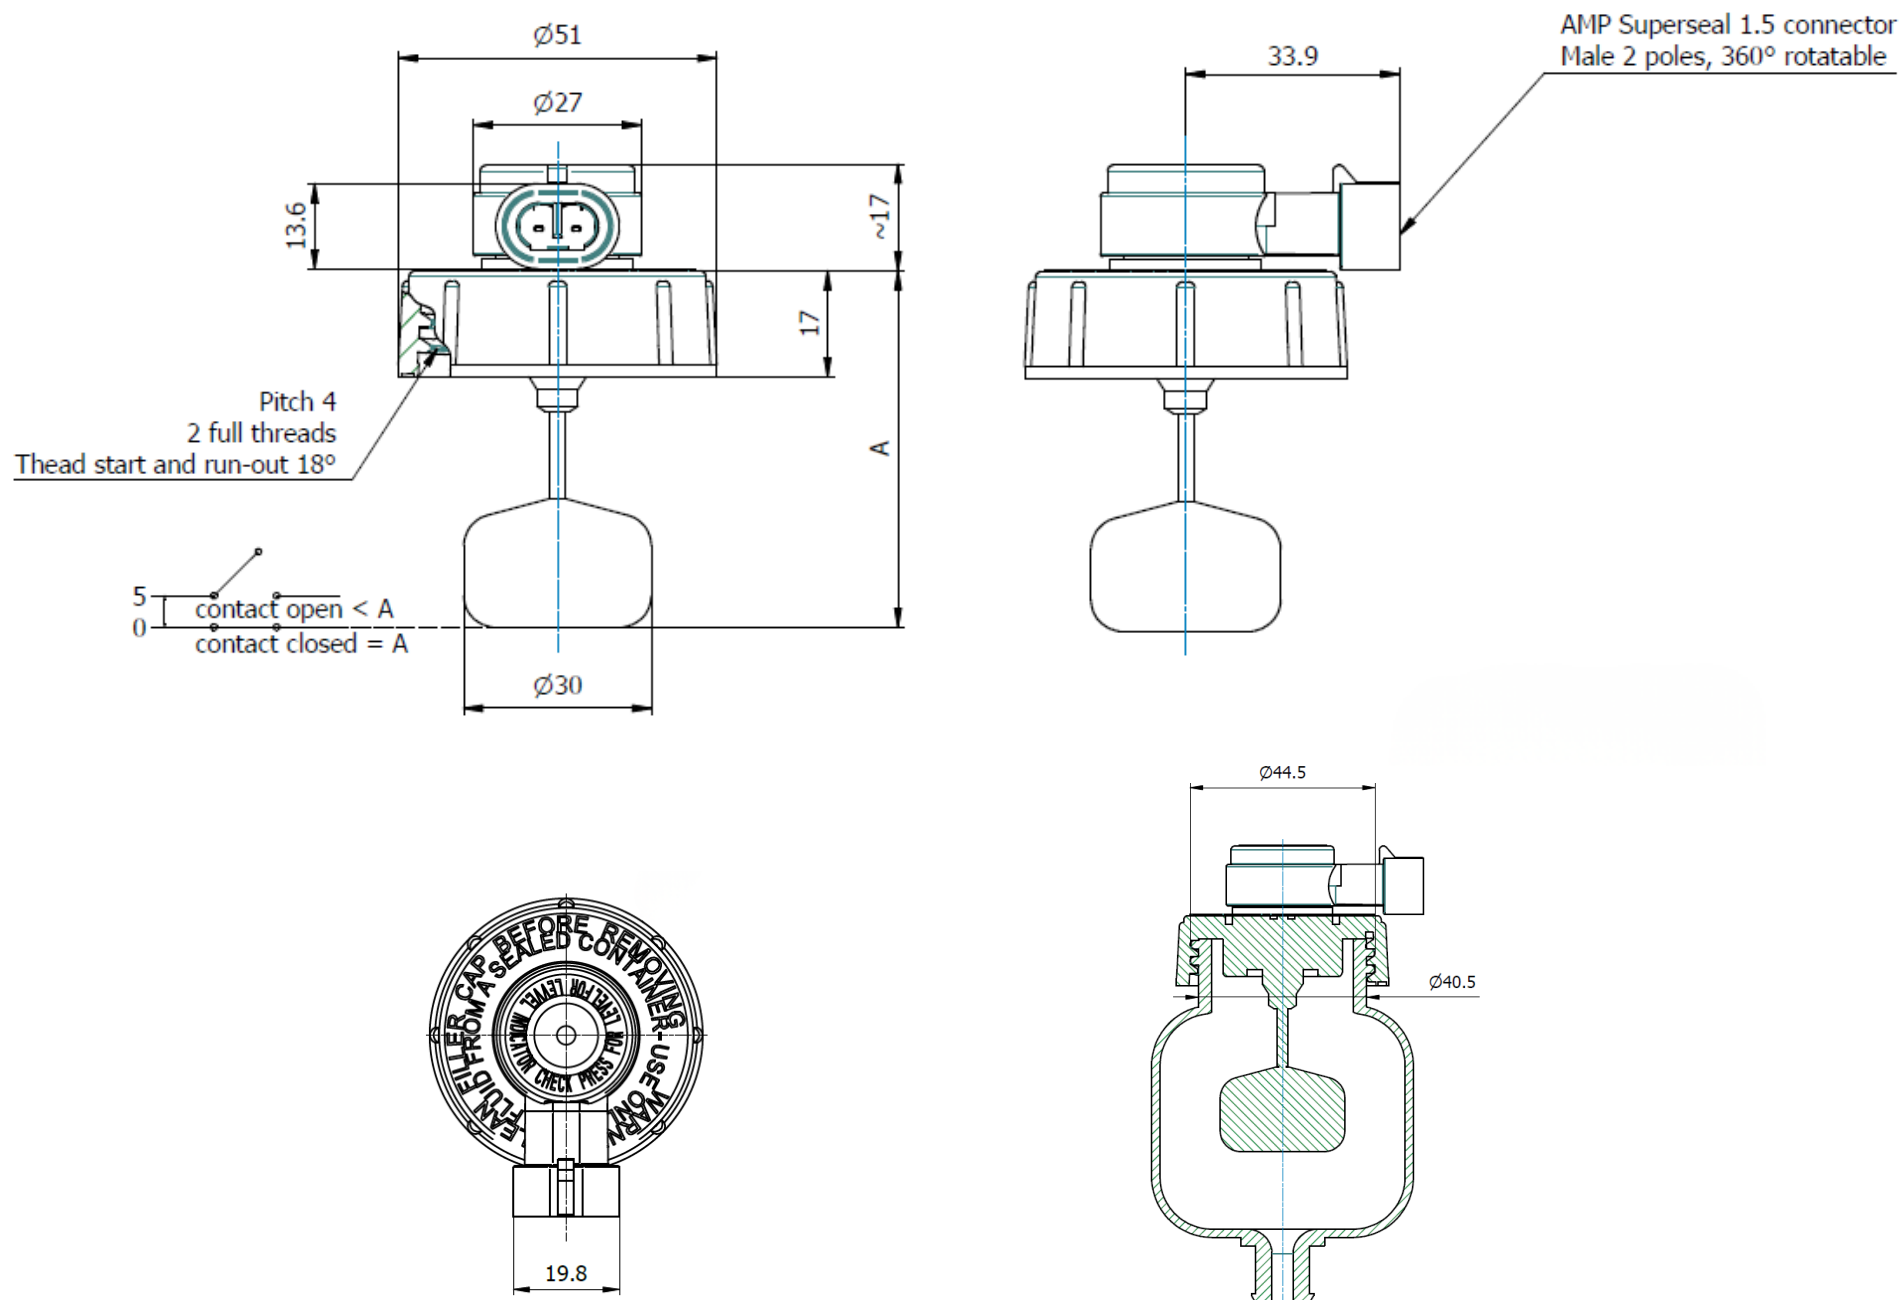

TECHNICAL SPECIFICATIONS

NOMINAL VOLTAGE	12	V
MAX SIGNAL CURRENT	< 250	mA
INGRESS PROTECTION	IP67	
COUPLING DIAMETERS	Ø 40,5 / 44,5	mm
THREADED INTERFACE	Pitch 4 - 2 turns	
FLUID COMPATIBILITY	DOT BRAKE FLUID / MINERAL OIL	

*Float height (A) customizable during the design phase.

VIMOTER S.p.A.
Via Nazario Sauro, 15
20037 Paderno Dugnano (MI)



www.vimoter.it
info@vimoter.it
+39 0362 364011

